

toporo



TECHNICAL DATA SHEET

TOPECA, Lda
Rua do Mosqueiro
2490-115 Cercal – Ourém
PORTUGAL

Tel.: 00 351 – 249 580 070
Fax.: 00 351 – 249 580 079


TOPECA
FÁBRICA DE PRODUTOS PARA CONSTRUÇÃO

geral@topeca.pt
www.topeca.pt

toporo

special products

porosity regulating primer

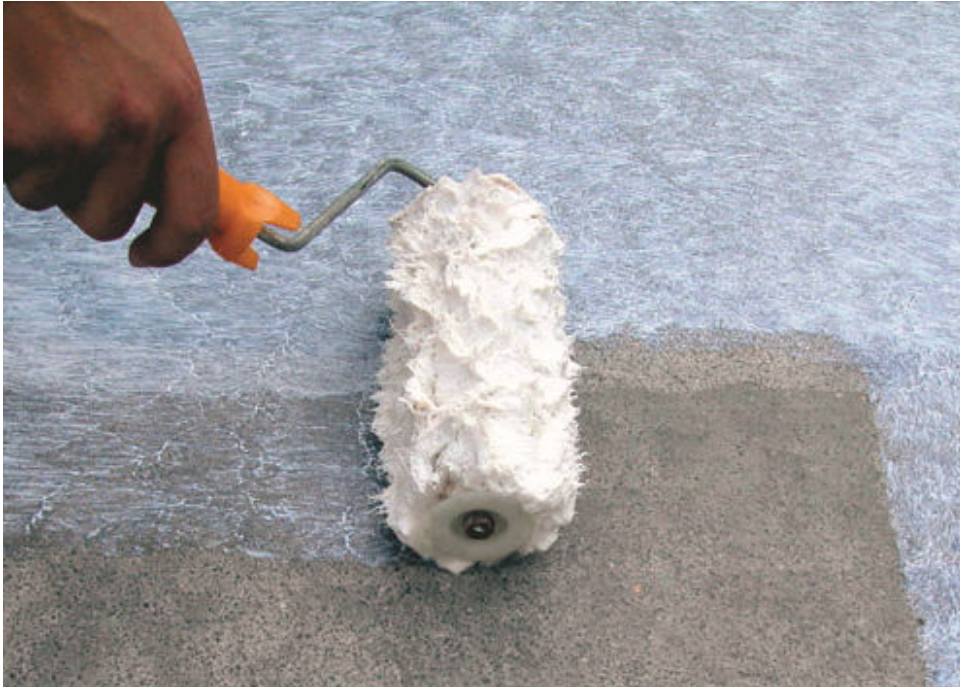

use

Regulates the porosity of the surface before the application of levelling mortars, self-levelling flowing screeds (avoids bubbles forming) and adhesives.

Improves the adherence of mortars and strengthens the cohesion of the surface on low resistance paving.

Deep penetration into the surface providing high stability.

Good bonding with pigments and powders.

Forms a film with high mechanical resistance.

Ecological product.

surface

Paving:

- Concrete;
- Light concrete;
- Screed Mortar;
- Self-levellers.

**Walls and ceilings:**

- Plaster;
- Plaster Blocks;
- Concrete;
- Render.

toporo

porosity regulating primer

special products

recommendations

Do not use on non-absorbent surfaces. In such cases use Toprim.

With particularly absorbent surfaces, Toporo should be liberally applied.

May be applied to damp surfaces.

Tools should be cleaned with water.

If you wish to paint a damp surface (a façade for example), Toporo should be first applied to the surface which can then be painted the following day.

composition and characteristics

Composition:

Resins in aqueous dispersion, specific additives.

Characteristics:

Drying time: 30 minutes to 4 hours.

Density: 1.02

pH: 6.5 - 8

Second layer: Approximately 1 hour after first application.

Application temperature: +5°C to 35°C.

NOTE: These results may vary depending on the temperature and mode of application. The tests performed at 20 °C.

colour

Light green

consumption

150 to 250 g/m² depending on absorption of surface.

available in

Bucket of 5 kg.

storage

1 year from date of manufacture in a sealed packet stored in a damp and heat free environment.



toporo

porosity regulating primer

special products

preparation of surface

Surfaces must be clean and dust free.
Remove paint and any cement flakes.



application

Mix lightly before applying.

Aplicar com um rolo, trincha ou pulverizador até saturação do suporte. Para recobrir esperar no mínimo 1 hora após a aplicação.

Apply with a roller, brush or spray equipment. Second layer can be applied approximately one hour later.

