

# tubetão

tapa fissuras

# TOPECA

mortar fills cracks and holes



## use

Tubetão Tapa Fissuras suitable for partial repairs and / or total regularization on old or new supports in interior and exterior.  
Suitable for treatment of cracks, pores and irregularities of the support.

## surfaces



- Cementitious substrates;
- Paint.

# tubetão tapa fissuras

mortar fills cracks and holes

# TOPECA

## recommendations

Do not use on hot surfaces (under direct sunlight).

Protect the area with plastic sheeting or wet concrete before the application of Tubetão Tapa Fissuras.

When multiple layers are applied to let harden before applying the next.

On substrates covered with plastic paint (well bonded and solid) in the outer cover, mix the Tubetão Tapa Fissuras with Latex Topeca in order to improve adhesion and flexibility.

## composition and characteristics

### Composition:

Special cements, silica and specific compounds selected additives.

### Characteristics:

Time of use the mixture: - / + 3 hours.

Thickness of application:

Spot repair: until 15mm (in layers 3 to 4mm).

Regularizations: until 2mm.

Coating time: 4 days.

Finishing time: 1-3 hours (3mm layer).

Application temperature: +5 ° C to +30 °

C.

Bulk density: 1 600 kg/m<sup>3</sup>

Density of hardened product: 1300 kg/m<sup>3</sup>

Adhesion to concrete:> 0.8 MPa.

Shock resistance: no visible changes occur.

Compressive Strength: ≥ 10MPa

Flexural Strength:> 2.5 Mpa

NOTE: Results obtained in laboratory conditions (20 °C). These results may vary depending on application conditions (temperature and relative humidity).

## colour

Grey

## consumption

1,7 Kg / m<sup>2</sup> per mm of thickness.

## available in

Bag with 2 and 5 kg.

## storage

1 year from date of manufacture in original sealed package.



# tubetão tapa fissuras

mortar fills cracks and holes

# TOPECA


## support preparation

Surfaces must be solid and clean and free of dust, stripping oils and rust.

Sound out surfaces to be repaired with a hammer.

Remove any damaged areas, degraded concrete or non-adherent paints until a solid surface is achieved.

In hot weather moisten surface.

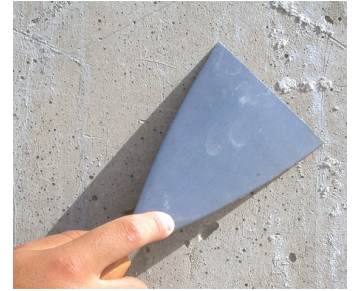

## application

Mix the powder with approximately 200g of clean water per 1kg of tubetão tapa fissuras. Mechanical mixing with a slow speed mixer is recommended, until an even paste is obtained. Allow to settle for 2 minutes and mix lightly again before applying.



Spread using a metal trowel or spatula in fine layers, filling and smoothing surfaces.



When Tubetão Tapa Fissuras starts to harden you may start to smooth further to give a sand finish using a wet sponge.



## admissible coatings

Organic paint and coatings :

- Rebetop Decor;
- Rebetop Color;
- Rebetop Gran.